


INSTRUCTIONS FOR DYNATUNER PANEL MOUNTING KIT - PM-4

The DYNATUNER Panel Mounting Kit consists of an oversize brass front plate, two mounting brackets, and hardware. It enables the user to mount the tuner on any panel up to 1-1/8" thick.

1. Cut a rectangular hole exactly 3-13/16" by 13-1/16" through which the tuner will be inserted.
2. Remove the knobs, brass front plate, bottom plate and cover from the tuner. Then remove the rubber feet.
3. Place the two #8 screws in the holes identified "panel mounting bracket" on the bottom plate. The screw heads should be inside the chassis. Install lockwashers and nuts and tighten securely.
4. With one of the brass plated #6 sheet metal screws, cut threads into the two outer holes of the tuner chassis front panel. The threads are cut now to avoid marring the screw head or the brass front plate later.
5. Reinstall the tuner bottom plate and cover.
6. Place the two metal brackets over the ends of the tuner so that the screws protrude through the bracket slots. Put the wing nuts on the screws loosely. 5/16
7. Slide the brackets toward the rear of the tuner and insert the tuner into the cabinet cutout from the rear.
8. Place the plastic slug in the oversize brass plate and fasten the plate to the tuner, using the 3/8" nut on the volume control and the two brass sheet metal screws. The small brass self-tapping screws should be installed at the tuning shaft last, to minimize any tendency for the threads to strip. 3/16
9. Press the tuner back against the panel, and slide the brackets forward until the panel is squeezed tightly between the front plate and the brackets. Tighten the wing nuts to hold the tuner in place. Replace the knobs. 3/16

Adequate ventilation must be provided, as the tuner generates heat equivalent to a 50 watt light bulb. In horizontal mounting, the tuner should be mounted above the preamplifier, and two inches of air space above should be allowed. Horizontal mounting is preferred to vertical mounting, as the front panel will get quite warm when mounted upright, and ventilation is restricted in this position.

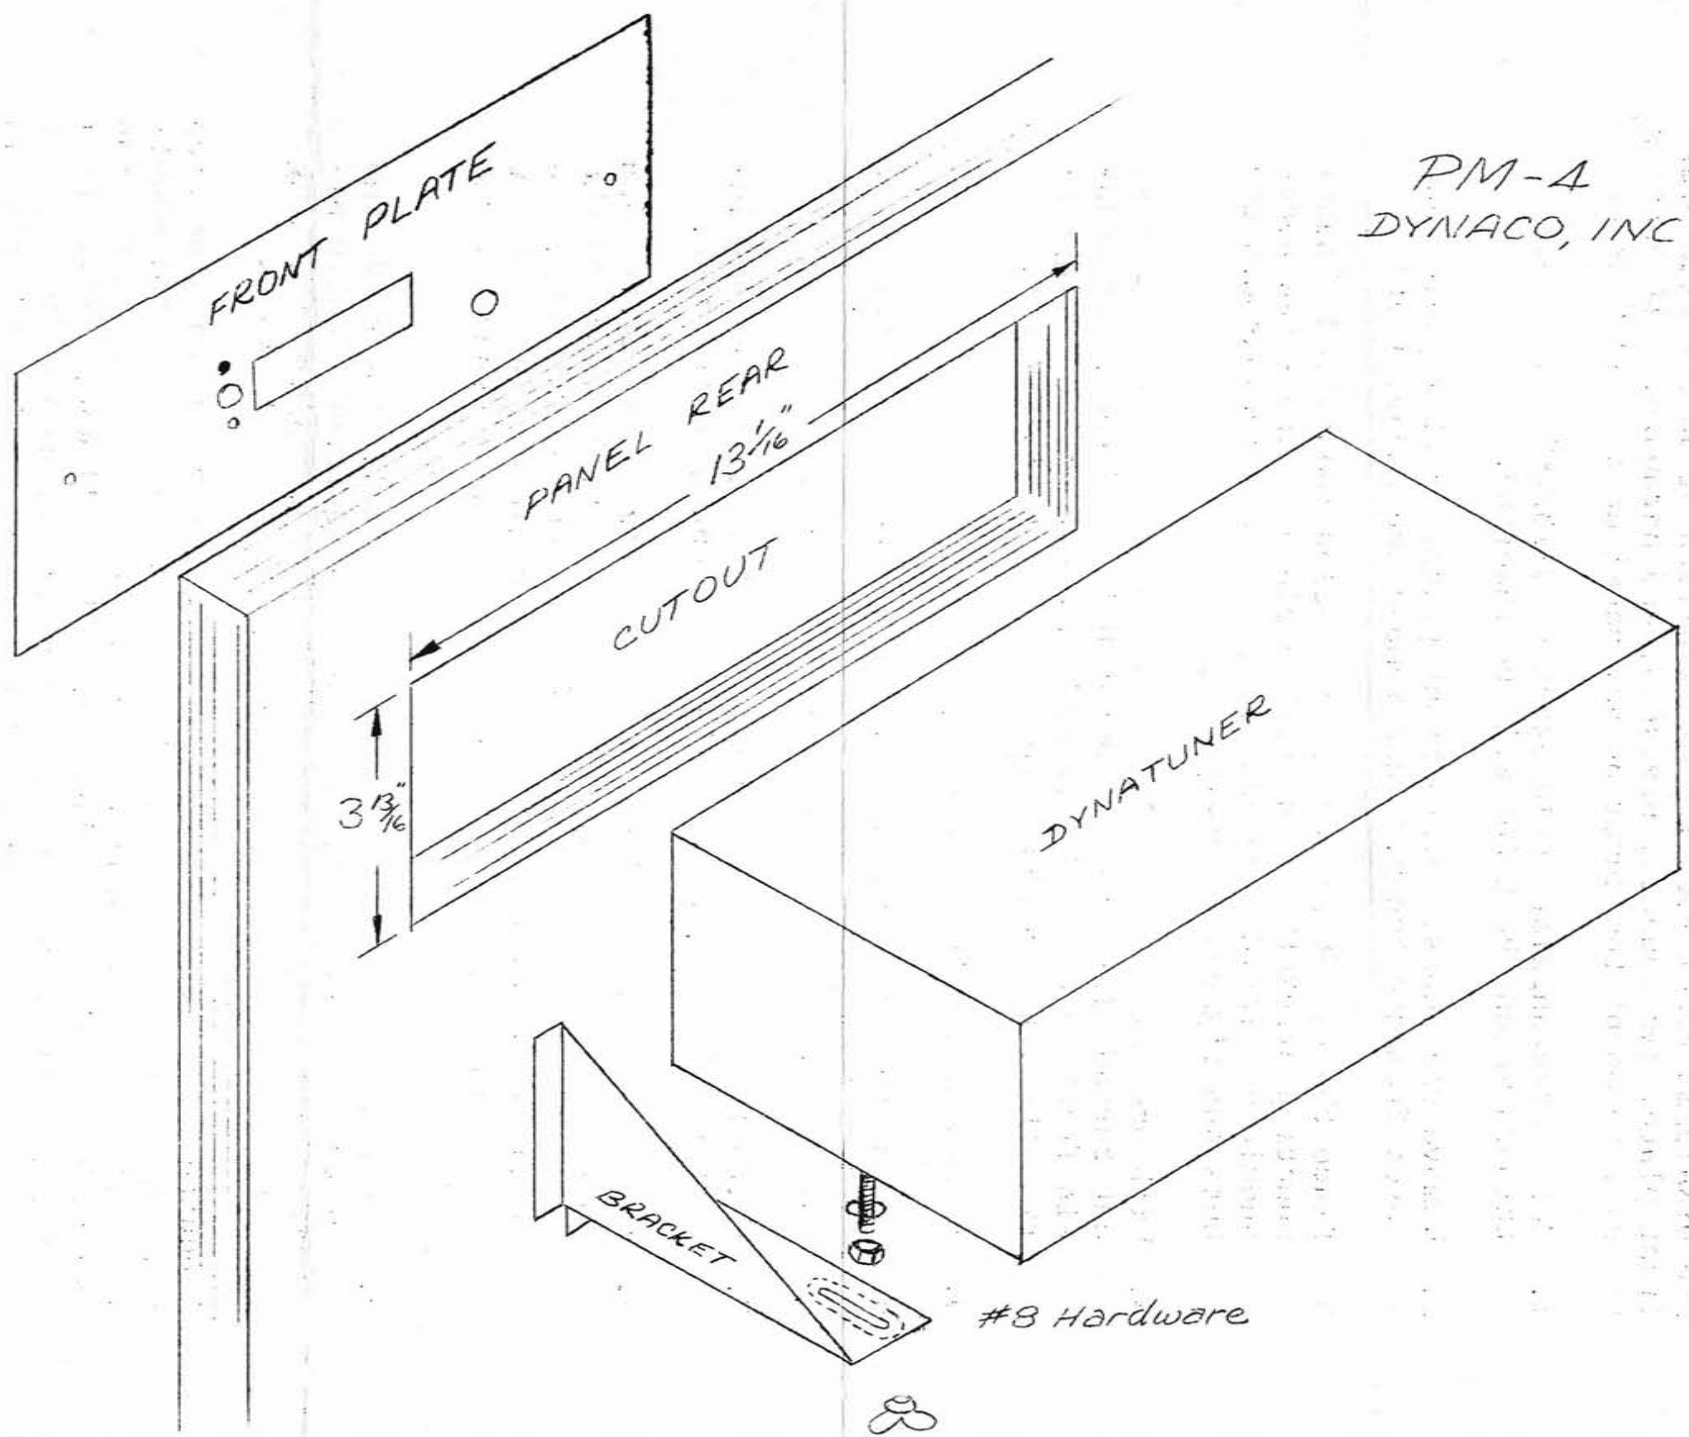

PM-4
DYNACO, INC.

REPRODUCED FOR INFORMATION BY THE NATIONAL BUREAU OF STANDARDS