



2C22

2C22

### AMPLIFIER TRIODE

Heater <sup>■</sup>	Coated Unipotential Cathode	
Voltage	6.3	a-c or d-c volts
Current	0.3	amp.
Direct Interelectrode Capacitances: <sup>○</sup>		
Grid to Plate	3.6	μf
Grid to Cathode	2.2	μf
Plate to Cathode	0.7	μf
Overall Length	3-1/8" ± 1/8"	
Seated Height	2-9/16" ± 1/8"	
Maximum Diameter	1-5/16"	
Bulb	T-9	
Caps (two RCA No. 3947)	Skirted Miniature	
Base	Intermediate Shell Octal 8-Pin	
Mounting Position	Any	

*Maximum Ratings Are Design-Center Values*

#### AMPLIFIER

Plate Voltage	300 <sup>●</sup> max.	volts
Plate Dissipation	3.3 max.	watts
<b>Characteristics - Class A<sub>1</sub> Amplifier:</b>		
Plate Voltage	300	volts
Grid Voltage *	-10.5	volts
Amplification Factor	20	
Plate Resistance	6600	ohms
Transconductance	3000	μmhos
Plate Current	11	ma.

- In circuits where the cathode is not directly connected to the heater, the potential difference between heater and cathode should be kept as low as possible.
- with no external shield.
- This value is for Continuous Commercial Service (CCS). In Intermittent Commercial and Amateur Service (ICAS), the plate voltage may be as high as 500 volts maximum, but the maximum plate dissipation remains unchanged.
- \* Under maximum rated conditions, the resistance in the grid circuit should not exceed 1.0 megohm.


The approximate resonant frequency of the input (grid-cathode) circuit is 335 megacycles.

2C22



2C22

## AMPLIFIER TRIODE

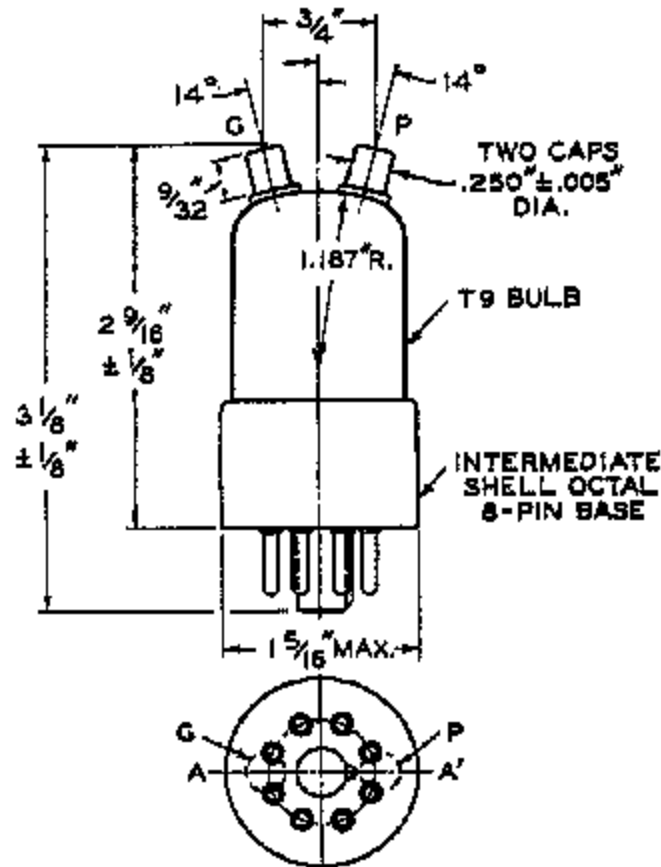


BOTTOM VIEW

## NOTE:

THE PLANE PASSING THROUGH THE CENTER OF EITHER CAP, PERPENDICULAR TO AND THROUGH THE CENTER OF THE BOTTOM OF THE BASE, SHALL NOT DEVIATE MORE THAN  $\pm 5^\circ$  FROM THE LINE A-A' THROUGH BASE PLUG AXIS AND KEY CENTER.

92C-6427

## BOTTOM VIEW OF SOCKET CONNECTIONS

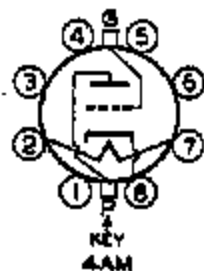

Pin 1 - No Connection  
 Pin 2 - Heater  
 Pin 3 - No Connection  
 Pin 4 - No Connection  
 Pin 5 - No Connection  
 Pin 6 - No Connection  
 Pin 7 - Heater  
 Pin 8 - Cathode  
 Cap above Pins 1 & 8 - Plate  
 Cap above Pins 4 & 5 - Grid

Mar. 20, 1943

RCA VICTOR DIVISION  
 RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY


CE-5427



2C22

2C22

### AVERAGE PLATE CHARACTERISTICS

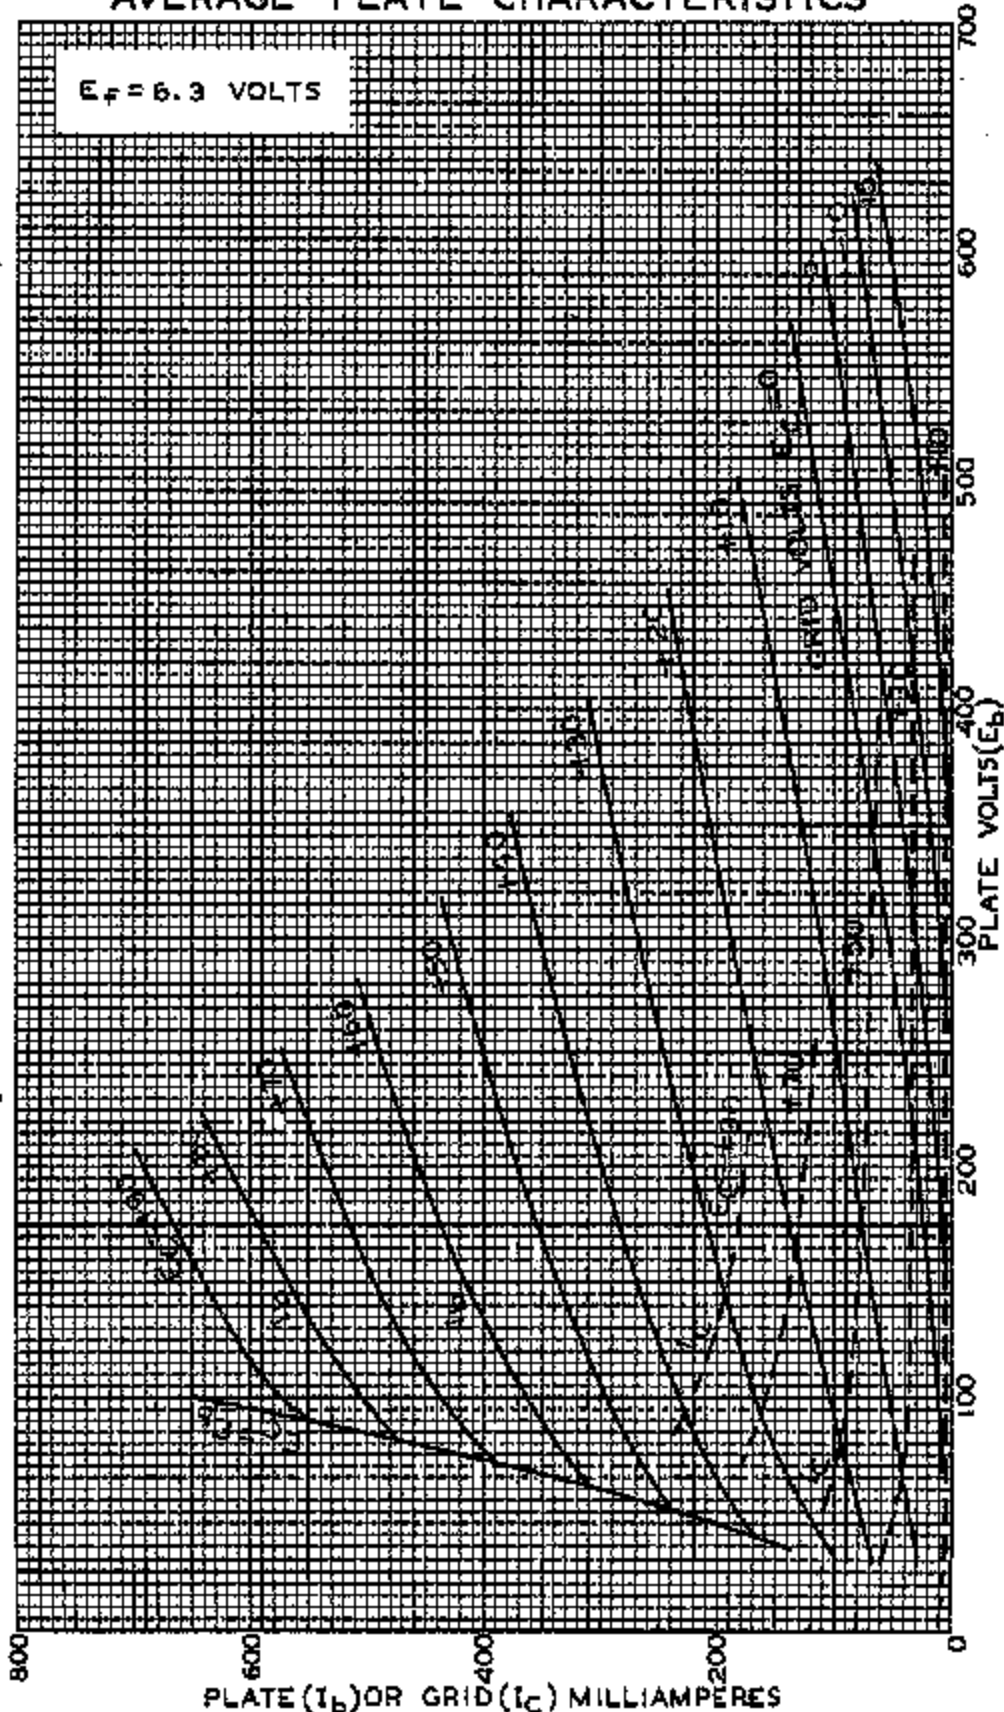

FEB. 23, 1943

PLATE ( $I_b$ ) OR GRID ( $I_c$ ) MILLIAMPERES

RCA VICTOR DIVISION

RADIO CORPORATION OF AMERICA HARRISON, NEW JERSEY

92C-8437


2C22



2C22

### AVERAGE PLATE CHARACTERISTICS

$E_f = 6.3$  VOLTS

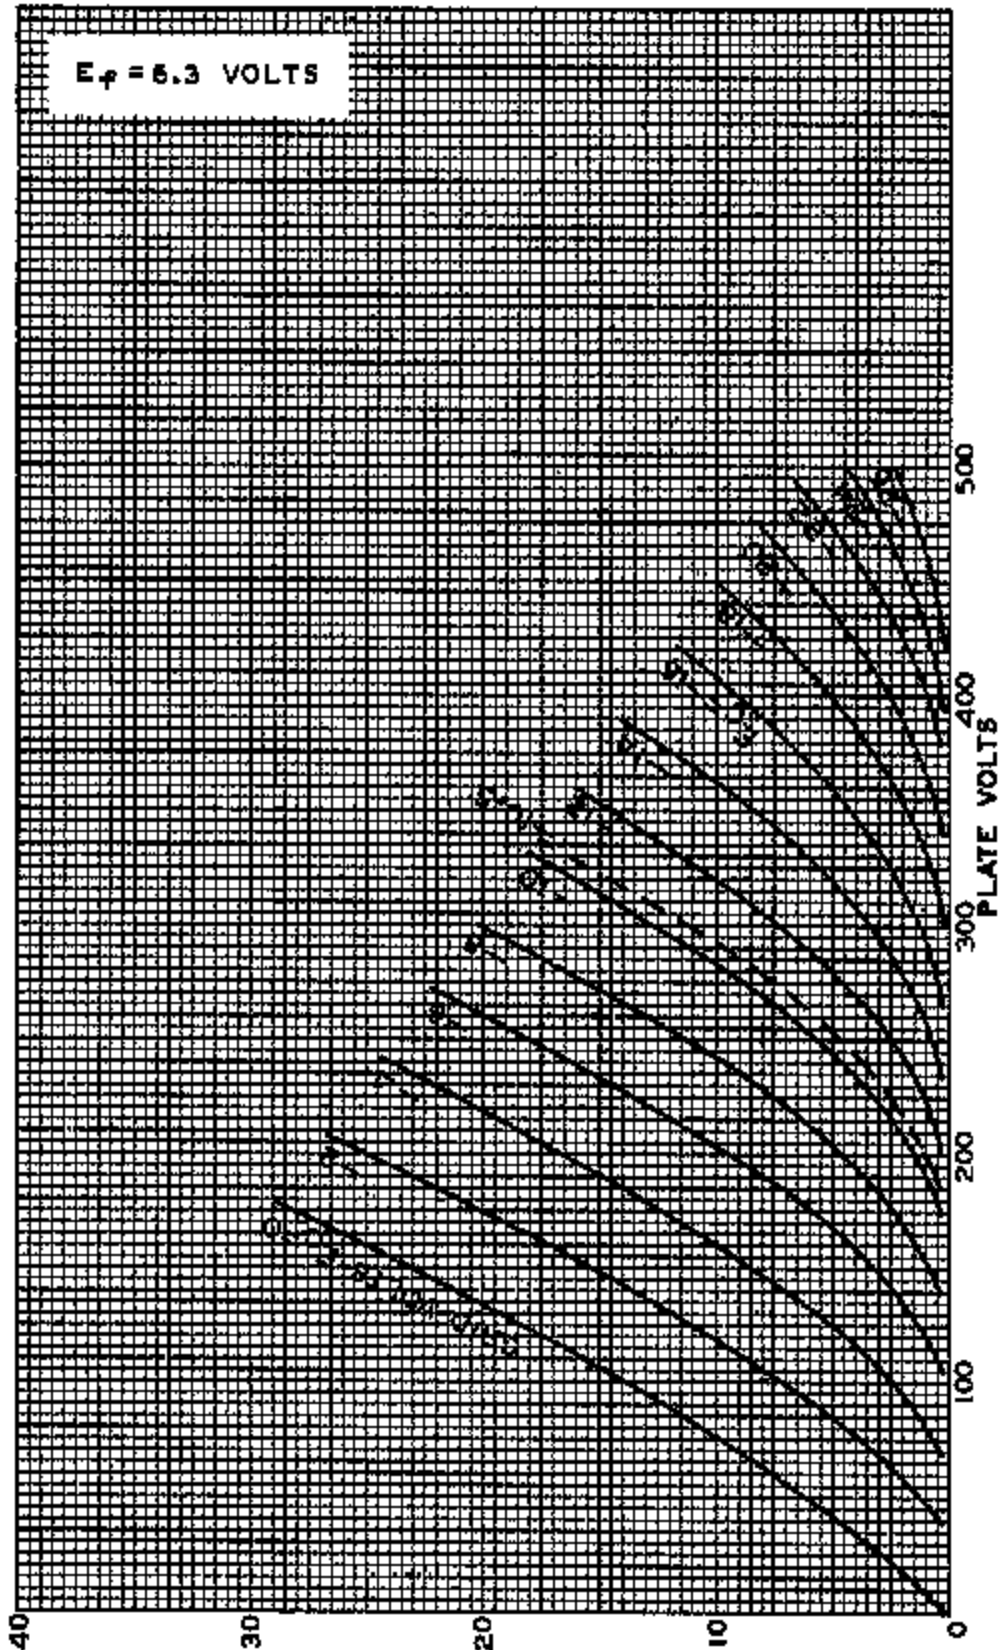

40

30

20

10

0

PLATE MILLIAMPERES

500

400

300

200

100

PLATE VOLTS

FEB. 22, 1943

RCA VICTOR DIVISION  
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92C-6436