

File Catalog: Special Purpose Electron Tubes
Section: Receiving Tubes




6900
Bendix Red Bank Type TE-54
(Generic Type 5687)

RELIABLE HARD GLASS MEDIUM MU TWIN TRIODE

(For Pulse Application)

DESCRIPTION

This miniature medium-mu twin triode is one of Bendix Red Bank  reliable vacuum tubes specifically designed for Pulse applications in missiles, aircraft and other military and industrial installations. Freedom from early failures, long average service life and uniform operating characteristics are considered prime requisites for such tubes. In addition to a 45-hour run-in under various overload, vibration and shock conditions, likely to be encountered in service, each tube is tested for its Pulse capabilities under maximum grid-drive and duty-cycle conditions.

Since this tube is designed for use in equipment with high ambient temperatures and where high levels of vibration and shock are encountered, special materials and manufacturing techniques are employed. The hard glass bulb and Tungsten stem seal construction are features found on many high-powered transmitting tubes. Careful exhaust to a high degree of vacuum, with complete out-gassing of all the elements by means of electron bombardment, as well as the usual induction heating, insures maximum life expectancy. These factors, as well as a conservative design center for cathode temperature, permit operation of the 6900 at bulb temperatures up to 300° Centigrade.

The use of ceramic spacers eliminates one of the most common sources of tube failure, which is the evolution of gas from other less costly materials, such as mica. Moreover, ceramic spacers contribute to a much sturdier structure with the use of multi-pillar supports locked together by 12 welded eyelets. Special alloy snubbers, which maintain the mount in position, retain their spring properties at high temperatures, resulting in a structure resistant to shock accelerations as high as 500 G. The rugged pure Tungsten heater is supported in a high density aluminum oxide insulator which permits operation at high Heater-Cathode voltages.

*Registered Trademark.

CHART 1. RATINGS*

Heater Voltage—(AC or DC)**	6.3 volts
Heater Current	1.00 amp.
Plate Voltage—(max.)	600 volts
Max. Peak Cathode Current***	4.5 amps.
Max. Plate Dissipation (per plate)	4.25 watts
Max. Peak Grid Voltage	±100 volts
Max. Heater-Cathode Voltage	100 ±500 volts
Max. Grid Resistance	1.0 megohm
Warm-up Time	45 sec.

(Plate and heater voltage may be applied simultaneously)

*To obtain greatest life expectancy from tube, avoid designs where the tube is subject to all maximum ratings simultaneously.

**Voltage should not fluctuate more than ±5%.

***See Chart 5.



CHART 2. MECHANICAL DATA

Base	9 Pin Miniature Nonex Glass— Gold Plated Pins
Bulb	Nonex Glass—T6 1/2
Max. Overall Length	2 3/4"
Max. Seated Height	1 1/4" Nom
Max. Diameter	3/8"
Mounting Position	any
Max. Altitude	80,000 feet
Max. Bulb Temperature	300°C
Max. Impact Shock	500 G
Max. Vibrational Acceleration	50 G
(100 hour shock excited fatigue test, sample basis)	
Life Expectancy	5,000 hrs.

CHART 3. PULSE TEST CONDITIONS AND AVERAGE CHARACTERISTICS

Heater Voltage	6.3 volts
Heater Current	1.00 amp.
Plate Voltage	500 volts
Grid Pulse	+50 volts
Grid Voltage	-100 volts
*Plate Current	4.25 amps.
*Grid Current	0.50 amp.
Pulse Time	10 μ sec.
Pulse Repetition Rate	250 pp sec.

*Both sections paralleled (Chart 10)

Bendix RED BANK DIVISION
AVIATION CORPORATION
EATONTOWN, NEW JERSEY

Publication No. E23-14

No. 1279 P. 1/8

Richardson Electronics

Jun. 4. 1966 1:59PM

Bendix
Red Bank
Printed in U.S.A.

RELIABLE MEDIUM MU TWIN TRIODE



Bendix Red Bank Type: TE-54
(Generic Type 5687)

6900

ELECTRICAL CHARACTERISTICS AND TEST DATA

RT 4. TEST CONDITIONS AND CHARACTERISTICS LIMITS

All Tubes are Stabilized for 45 Hours Under Test Conditions and
2 G Vibration at 30 Cps. Prior to 100% Testing

Heater voltage, E_h 6.3 volts
Plate voltage, E_p 120 volts
Grid voltage, E_g -2.0 volts

CHARACTERISTIC	SYMBOL	MIN.	DESIGN CENTER	MAX.	UNITS
PRODUCTION TESTS					
Current	I_f	.950	1.000	1.050	A
Cathode Leakage	I_{hk}	—	—	25	μ adc
Current	I_{cl}	—	—	7.0	μ adc
Current	I_b	25	36	47	mAadc
Conductance (I)	S_m	8000	11500	15000	umhos
Conductance (I) E_g = 5.7	ΔS_m	—	—	15	%
and Continuity					
DESIGN TESTS					
Life of Electrodes					
E_p = 100 Vdc	R	100	—	—	meg
E_p = 300 Vdc	R	100	—	—	meg
1 Plate Current					
E_g = 25 Vdc E_h = 300	I_b	—	—	2000	μ adc
E_g = 55 Vdc E_h = 500	I_b	5	—	560	μ adc
Heated Grid Current (E_f = 7.0 V)	I_{cl}	—	—	5.0	μ adc
Grid Plate Emission (E_h = 195 Vac)	I_k	—	—	25	μ adc
Location Factor	MUF	16.0	18.5	21.0	
Line Wave Output					
E_p = 120 Vdc	E_p	—	—	500	mVac
E_p = 2 Vdc					
E_p = 7000					
Frequency = 40-500—					
Self Acceleration = 2.5 G					
Source (without shield)					
	C_{g1-p}	2.8	—	5.2	μ pf
	C_{in}	5.0	—	8.8	μ pf
	C_{out}	0.62	—	0.99	μ pf
	C_{out}	0.45	—	0.77	μ pf
	CHK	2.0	—	4.0	μ pf


CHART 6. ADDITIONAL TESTS

In addition to the production and design tests shown in Chart 3 other tests are performed on a sampling basis to assure a high outgoing quality level. See below.

TEST	CONDITIONS	DURATION
Heater Cycling Life Test	On 1 Min. OR 4 Min. E_f = 7.5 E _{hk} = 300	2,000 On Off Cycles
Life Test	Under "Pulse Test Conditions"	500 Hours
Life "Expectancy" Test	Under "Pulse Test Conditions"	5,000 Hours
High Level Fatigue Test	2.5 G 40-500 Cycles Sweep Frequency	96 Hours
Shock	500 G	20 Impacts
Altitude Test	80,000 Feet	5 Minutes
Glass Strain Test	Boiling Water to Ice Water	15 Seconds in Each
Mount Impaction	100% Test—Microscopic Impaction at 30 Possible Trouble Points	


CHART 7.

AVERAGE CHARACTERISTICS



RT 5.

PULSE RATING




DUTY FACTOR (10,000 MICROSECOND AVERAGING TIME) FOR THE 6900 IS DEFINED AS THE RATIO OF "ON" TIME IN MICROSECONDS TO 10,000 MICROSECONDS.

ON TIME IS DEFINED AS THE SUM OF THE DURATION OF ALL INDIVIDUAL PULSES WHICH OCCUR DURING ANY 10,000 MICROSECOND INTERVAL.

CHART 8.

AVERAGE CHARACTERISTICS (PULSE)




RELIABLE MEDIUM MU TWIN TRIODE



Bendix Red Bank Type TE-54
(Generic Type 5687)

6900

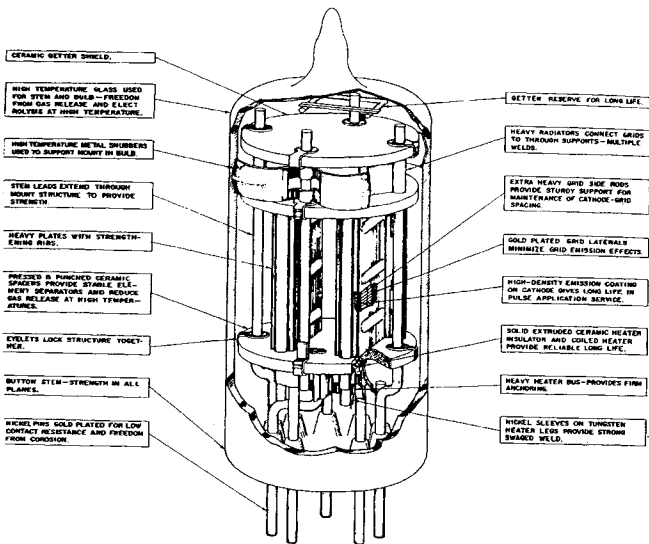

STRUCTURAL FEATURES OF 6900 PROVIDE HIGH RELIABILITY AND LONG LIFE.

Bendix RED BANK DIVISION
AVIATION CORPORATION
EATONTOWN, NEW JERSEY


Bendix
Red Bank

West Coast Sales & Service: 117 E. Providence Ave., Burbank, Calif.
Export Sales & Service: Bendix International Division
235 E. 42nd St., New York 17, N.Y.

Base Connections:

Pin No.	1	2	3	4	5	6	7	8	9
Element	2p	2g	2k	h	h	1k	1g	hot	lp

*-match
for bias, AC Balance!
DC balance!*



Characteristics

Mechanical: 7/8" O.D., 2-5/8" max. overall length. See outline. The type 6900 electron tube is designed for use in equipment with high ambient temperatures and where high levels of vibration and shock are encountered. The tube is constructed of hard glass and uses tungsten seals, and is constructed internally using ceramic insulators and getter shield, special alloy snubbers, alumina heater-cathode insulator, gold plated grids. It is processed at high temperatures using the best power tube techniques. The tube may be used at altitudes to 60,000 feet and with bulb temperature to 250° C and vibrations up to 5 G, although maximum life is obtained when these values are held to a minimum.

Static:

Heater Voltage	6.3 V ± 5%
Heater Current	1.0 Amp ± 50 ma
Plate Voltage - 600 V max -	500 V operating & test
Plate Current (test conditions)	36 ma
Transconductance	11,500 ± 25%
Amplification Factor	18.5 ± 20%
Grid Voltage - typical -	-23 V

Dynamic:

Heater Voltage	6.3 V
Plate Voltage	500 V
Duty Cycle - typical -	.0025
Pulse Width	10 usec
Cathode Current (both sect, parallel)	4.0 A
Grid Drive (grid-cathode volts)	+50 V
Grid Bias	-100 V
Plate Current Average	11.0 ma

Note: Production Testing is done under dynamic conditions. Sample tests are made at static conditions of:
 Ef = 6.3 V Eb = 120 Vdc Ec = -2.0 V

				M U INCORPORATED P. O. BOX 1007 2841 SAN LUIS REY RD. OCEANSIDE, CA. 92054			
				SPECIFICATION 6900			
PART	DESCRIPTION	MAT'L	REF.	SCALE	DWN. BY	DWG. NO.	REV. NO.
				1:1	RAE	2-3787	
BILL OF MATERIAL				DATE	APPV. BY	REV. DATE	REV. NO.
				6-25-76	LAURE	2-1-77	1